

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 1 110 694 A1

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:  
27.06.2001 Bulletin 2001/26

(51) Int Cl.7: B29C 44/34; B29C 44/08

(21) Application number: 99830797.9

(22) Date of filing: 23.12.1999

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventor: Olivier, Giacoma  
32014 Ponte Nelle Alpi (Belluno) (IT)

(74) Representative: Lanzoni, Luciano  
c/o BUGNION S.p.A.  
Via G. Garibaldi n. 19  
37121 Verona (IT)

(71) Applicant: Olivier, Giacoma  
32014 Ponte Nelle Alpi (Belluno) (IT)

(54) Method for producing partially expanded bodies with a pvc-based cellular structure and mould for their production

(57) The present invention relates to a method for producing partially expanded bodies with a PVC-based embryo cellular structure comprising the steps of filling a plurality of moulds (1) with a paste containing PVC, loading these moulds (1) onto a press provided with heating and cooling means designed to subject the paste to the combined action of an increase in pressure and variation in temperature, expansion of the paste inside the moulds (1) and consequent forming of partially expanded bodies with an embryo cellular structure. In accordance with the present invention, during the expansion step, a step involving transfer of a first excess amount of paste from a main compartment (4) of the mould (1) to a secondary compartment (5) of the mould (1) takes place. This results in the formation, during the expansion and consequent forming step inside the main compartment (4), of a partially expanded main body with an embryo cellular structure and, inside the secondary compartment (5), of a partially expanded secondary body with an embryo cellular structure. The containing area (3) of the mould (1) is divided by a separation baffle (6) into two compartments, i.e. a main compartment (4) and a secondary compartment (5), communicating with each other by means of connection channels (8) formed on the separation baffle (6) itself.

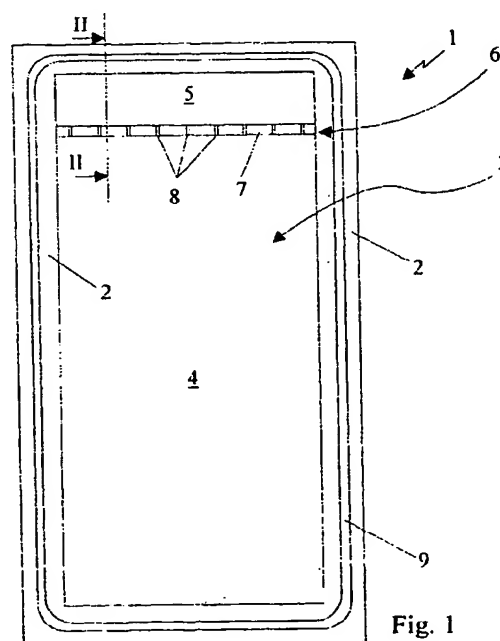


Fig. 1

EP 1 110 694 A1

BEST AVAILABLE COPY

## Description

[0001] The present invention relates to a method for producing partially expanded bodies with a PVC-based embryo cellular structure and to a mould for the production of these bodies.

[0002] More precisely, the method and the mould which form the subject of the present invention are advantageously used for the production of partially expanded bodies (called "embryo cellular bodies" in the specific technical sector) which, as a result of subsequent chemical-physical treatment, can be used to obtain expanded products, mainly in the form of panels, which can be used as thermal/acoustic insulators in the building sector or for applications in the naval or aeronautic sector or also for imparting floating properties to boats, etc.

[0003] As is known, the production process which results in the manufacture of the panels envisages initially the formation of a paste consisting of a mixture of powders (PVC and other compounds) and liquid substances (in particular isocyanates).

[0004] Subsequently the paste is subjected to pressure, heating and subsequent cooling inside suitable moulds from where the so-called "embryo cellular bodies" are then extracted. The latter, following further heat treatment in water or steam ovens, are further expanded as a result of the hydrolysis reaction of the isocyanate groups present in the material, giving rise to the formation of the panels.

[0005] At present, the methods for the production of "embryo cellular bodies" envisage filling the moulds with quantities of pastes greater than that required (with an excess amount, in terms of weight, equal to about 8% of the product leaving the mould) so as to allow gaseous inclusions to escape from the moulds during the heating step. In other words, the excess paste introduced into the moulds allows, at the end of processing, panels with a perfectly regular shape, devoid of gaseous forms or cavities, to be obtained.

[0006] In accordance with a first known embodiment of a method and apparatus for the production of "embryo cellular bodies", the excess paste equivalent to 8% by weight emerges from the top edge of the mould.

[0007] Generally this occurs after about 5-6 minutes from the start of heating of the moulds following the increase in pressure which occurs inside them owing to the chemical reactions which develop in the pastes.

[0008] Consequently there is a non-recoverable wastage of material (since at high temperature the PVC gelatinizes and the expanding substances deteriorate).

[0009] At the same time the drawing off of the harmful vapours is necessary, with a consequent obvious increase in the production costs which have a negative effect on the cost of the final product.

[0010] More recently, in order to overcome at least partly these drawbacks, a second embodiment of a method and apparatus for the production of "embryo cellular bodies" has been devised, by means of which it is possible to recover and therefore re-use the excess paste introduced initially into the moulds, thereby avoiding the wastage of material and the danger of environmental pollution caused by the evaporation of the isocyanates.

[0011] This second embodiment, which is described in the patent No. IT 1,242,873 and envisages the extraction of the excess paste during a step of the process involving heating of the paste in the moulds, has in practice proved to have certain drawbacks.

[0012] In fact, it uses means for extraction of the excess paste which are costly, impractical, pose considerable maintenance problems and do not allow subsequently basically an optimum re-use of the excess paste.

[0013] The main object of the present invention is therefore that of overcoming the drawbacks associated with the methods and the moulds of the known type by providing a new method for producing partially expanded bodies with a PVC-based embryo cellular structure which allows the recovery in a simple and low-cost manner of substantially all the excess paste introduced initially into the moulds, avoiding at the same time wastage of material and risks of environmental pollution caused by the evaporation of the isocyanates.

[0014] A further object of the present invention is that of providing a mould for the production of these partially expanded bodies which allows recovery of the excess paste initially introduced inside it.

[0015] Another object of the present invention is that of providing a mould for the production of partially expanded bodies with a PVC-based embryo cellular structure, which is simple, reliable and does not require high maintenance costs.

[0016] The technical characteristics of the invention, in accordance with the abovementioned objects, may be clearly understood from the contents of the claims indicated below and the advantages thereof will emerge more clearly from the detailed description which follows, with reference to the accompanying drawings, which show some purely exemplary and non-limiting embodiments in which:

- Figure 1 shows a schematic plan view of the mould according to the present invention;
- Figure 2 shows a side view, on a larger scale and in cross-section, of a portion of the mould according to Figure 1;
- Figure 3 shows a partial schematic plan view of a portion of a variation of embodiment of the mould according to the present invention.

[0017] In accordance with the figures of the accompanying drawings, 1 denotes, in its entirety, the mould according to the present invention.

[0018] The mould 1 has a substantially rectangular shape bounded perimetally by a perimetral edge 2 (with

paste from a main compartment (4) of said mould (1) to a secondary compartment (5) of said mould (1) takes place, said expansion step and said forming step consequently producing inside said main compartment (4) and secondary compartment (5) respectively a partially expanded main body and secondary body with an embryo cellular structure.

2. Method according to Claim 1, characterized in that said transfer step takes place during said expansion step when the pressure inside the paste reaches a threshold value designed to allow the passage of the first excess amount of paste through connection channels (8) arranged between said main compartment (4) and said secondary compartment (5).
3. Mould for the production of partially expanded bodies with a PVC-based embryo cellular structure, which can be charged with a paste containing PVC, expanding substances, stabilizers and liquids containing isocyanates and which can be used in a press operationally associated with heating and cooling means which are designed to subject said paste to the combined action of an increase in pressure and variation in temperature, said mould (1) being peripherally bounded by a perimetral edge (2) designed to define a containing area (3) for receiving said paste and produce said partially expanded bodies with an embryo cellular structure, characterized in that the containing area of said mould (1) is divided by a separation baffle (6) into at least two compartments, i.e. a main compartment (4) and a secondary compartment (5), which communicate with each other by means of connection channels (8) formed on said separation baffle (6).
4. Mould according to Claim 3, characterized in that said secondary compartment (5) has dimensions smaller than those of said main compartment (4).
5. Mould according to Claim 3, characterized in that said main compartment (4) discharges via said connection channels (8) a first excess amount of paste into said secondary compartment (5).
6. Mould according to Claim 5, characterized in that said first excess amount of paste is equivalent to 7-9% by weight of the paste originally introduced inside said mould (1).
7. Mould according to Claim 3, characterized in that said secondary compartment (5) discharges externally a second excess amount of paste equivalent to 7-9% by weight of the paste originally discharged inside it from said main compartment (4).
8. Mould according to Claim 3, characterized in that said connection channels (8) consist of transverse

channels formed on the upper surface (7) of said separation baffle (6).

9. Mould according to Claim 3, characterized in that a perimetral groove (9) is formed on top of said perimetral edge (2).
10. Mould according to Claim 9, characterized in that said secondary compartment (5) discharges said second excess amount of paste into said perimetral groove (9).
11. Mould according to Claim 9, characterized in that said groove (9) is formed on the perimetral edge (2) only in the region of said secondary compartment (5).

BEST AVAILABLE COPY

- paste from a main compartment (4) of said mould (1) to a secondary compartment (5) of said mould (1) takes place, said expansion step and said forming step consequently producing inside said main compartment (4) and secondary compartment (5) respectively a partially expanded main body and secondary body with an embryo cellular structure.
2. Method according to Claim 1, characterized in that said transfer step takes place during said expansion step when the pressure inside the paste reaches a threshold value designed to allow the passage of the first excess amount of paste through connection channels (8) arranged between said main compartment (4) and said secondary compartment (5).
  3. Mould for the production of partially expanded bodies with a PVC-based embryo cellular structure, which can be charged with a paste containing PVC, expanding substances, stabilizers and liquids containing isocyanates and which can be used in a press operationally associated with heating and cooling means which are designed to subject said paste to the combined action of an increase in pressure and variation in temperature, said mould (1) being peripherally bounded by a perimetral edge (2) designed to define a containing area (3) for receiving said paste and produce said partially expanded bodies with an embryo cellular structure, characterized in that the containing area of said mould (1) is divided by a separation baffle (6) into at least two compartments, i.e. a main compartment (4) and a secondary compartment (5), which communicate with each other by means of connection channels (8) formed on said separation baffle (6).
  4. Mould according to Claim 3, characterized in that said secondary compartment (5) has dimensions smaller than those of said main compartment (4).
  5. Mould according to Claim 3, characterized in that said main compartment (4) discharges via said connection channels (8) a first excess amount of paste into said secondary compartment (5).
  6. Mould according to Claim 5, characterized in that said first excess amount of paste is equivalent to 7-9% by weight of the paste originally introduced inside said mould (1).
  7. Mould according to Claim 3, characterized in that said secondary compartment (5) discharges externally a second excess amount of paste equivalent to 7-9% by weight of the paste originally discharged inside it from said main compartment (4).
  8. Mould according to Claim 3, characterized in that said connection channels (8) consist of transverse channels formed on the upper surface (7) of said separation baffle (6).
  9. Mould according to Claim 3, characterized in that a perimetral groove (9) is formed on top of said perimetral edge (2).
  10. Mould according to Claim 9, characterized in that said secondary compartment (5) discharges said second excess amount of paste into said perimetral groove (9).
  11. Mould according to Claim 9, characterized in that said groove (9) is formed on the perimetral edge (2) only in the region of said secondary compartment (5).

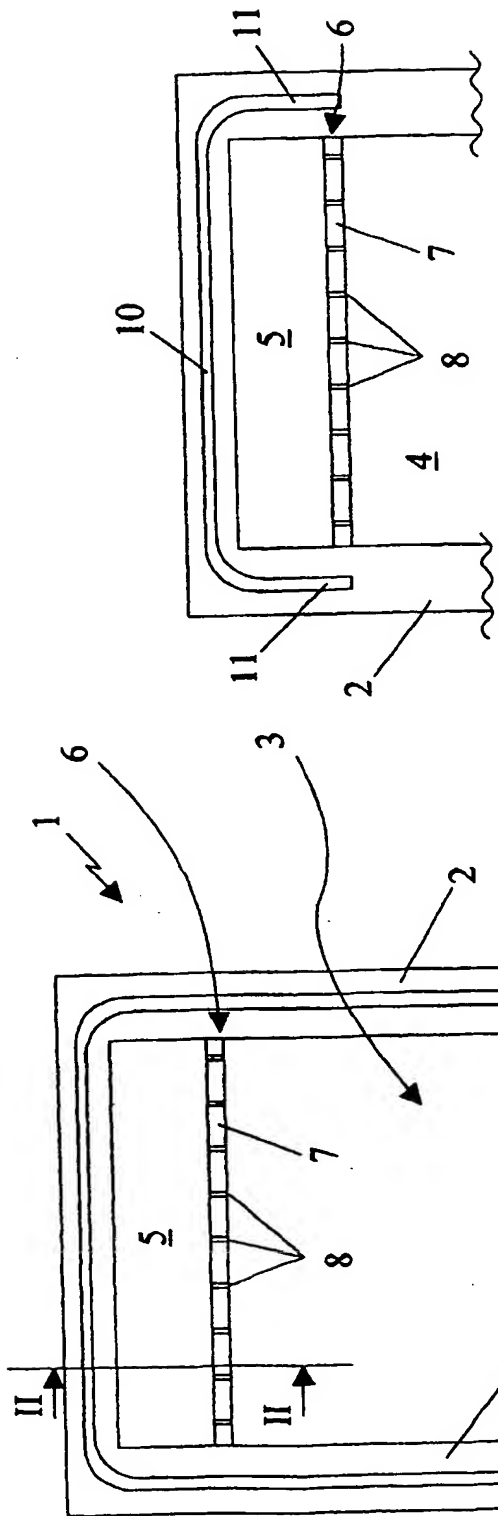


Fig. 1

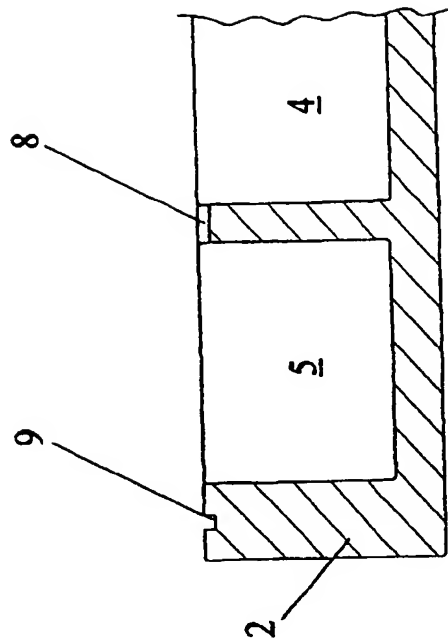


Fig. 2

Fig. 3



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 83 0797

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 2 525 880 A (FELDMAN JOHN E) 17 October 1950 (1950-10-17) * claim 1; figures; example * * column 4, line 60 - line 63 * ---	1-6,8	B29C44/34 B29C44/08
A	DE 196 17 284 A (HENNECKE GMBH) 6 November 1997 (1997-11-06) * figures * ---	9-11	
A	PATENT ABSTRACTS OF JAPAN vol. 006, no. 220 (M-169), 5 November 1982 (1982-11-05) & JP 57 125026 A (IKEDA BUTSUSAN KK), 4 August 1982 (1982-08-04) * abstract; figures * -----	3,4	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			B29C
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>10 May 2000</b>	Examiner <b>Pipping, L</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons S : member of the same patent family, corresponding document			

EP0 FORM 1503 03/92 (PAC01)

ARCH REPORT  
CATION NO.

EP 99 83 0797

nts cited in the above-mentioned European search report.  
n  
h are merely given for the purpose of information.

10-05-2000

Patent family member(s)	Publication date
NONE	
NONE	
JP 1596863 C	28-01-1991
JP 2017335 B	20-04-1990



European Patent  
Office

EUROPEAN SE

DOCUMENTS CONSIDERED TO BE	
Category	Citation of document with indication, where app of relevant passages
X	US 2 525 880 A (FELDMAN JOHN E. 17 October 1950 (1950-10-17) * claim 1; figures; example * * column 4, line 60 - line 63 *
A	DE 196 17 284 A (HENNECKE GMBH) 6 November 1997 (1997-11-06) * figures *
A	PATENT ABSTRACTS OF JAPAN vol. 006, no. 220 (M-169), 5 November 1982 (1982-11-05) & JP 57 125026 A (IKEDA BUTSUSA 4 August 1982 (1982-08-04) * abstract; figures *

The present search report has been drawn up for all

Place of search	Date of com
THE HAGUE	10 Ma

CATEGORY OF CITED DOCUMENTS

X : particularly relevant if taken alone  
Y : particularly relevant if combined with another document of the same category  
A : technological background  
O : non-written disclosure  
P : intermediate document

BEST AVAILABLE COPY

**GE IS BLANK**

**THIS PAGE IS BLANK**